

## PRODUCT DATA SHEET

## Sika® Ucrete® MF 40 AS

Antistatic, smooth heavy-duty polyurethane flooring screed

## DESCRIPTION

Sika® Ucrete® MF 40 AS is a heavy-duty resin floor which provides a smooth protective antistatic floor finish suitable for applications in predominantly dry ESD and ECF environments.

## USES

Sika® Ucrete® MF 40 AS is used in the electronics industry to protect sensitive electronic devices and in explosion hazardous areas.

Sika® Ucrete® MF 40 AS is used within dry process areas including the following application areas:

- Food and beverage facilities
- Pharmaceutical facilities
- Chemical and processing facilities
- Clean rooms
- Electronic facilities and data centres
- Defence estates

Please note:

- The Product may only be used by experienced professionals.

## CHARACTERISTICS / ADVANTAGES

- Expert installation by fully trained and licensed applicators
- Resistant to bacterial or mould growth
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed
- Electrostatically conductive
- Very good resistance to specific chemicals
- Very good mechanical resistance
- Impermeable to liquids
- Non-tinting after curing
- Odourless
- Thermal expansion properties similar to concrete
- Tolerant to substrates with high moisture content

## APPROVALS / STANDARDS

- Food and Beverage Facilities Suitability, Sika® Ucrete®, HACCP, Test Report No. I-PE-769-SA-2-RG-06b
- Halal Certification Europe (HCE), Sika® Ucrete®, WHFC, Certificate No. 21453-2/1/1/Y1
- Indoor Air Comfort Gold EN 16516, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2023

## PRODUCT INFORMATION

Chemical base	Water-based polyurethane cement hybrid	
Packaging	Part 1	2.933 kg
	part 2	3.29 kg
	Part 3	11.0 kg
	Part 4	0.5 kg
	Set	17.723 kg
Colour	Cured colour	Red, Orange, Yellow, Bright Yellow, Cream, Grey, Light Grey, Green, Light Green, Green/ Brown, Blue.
Shelf life	Always refer to the best-before date of the individual packaging.	

<b>Storage conditions</b>	The Product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to the packaging. Refer to the current Safety Data Sheet for information on safe handling and storage.		
<b>Density</b>	Mixed Product	~1.97 kg/l	(EN ISO 2811-1)

## TECHNICAL INFORMATION

<b>Compressive Strength</b>	Cured 28 days at +23 °C	50 N/mm <sup>2</sup>	(EN 13892-2)
<b>Modulus of Elasticity in Compression</b>	4000 MPa		(BS 6319-6)
<b>Tensile Strength in Flexure</b>	Cured 28 days at +23 °C	20 N/mm <sup>2</sup>	(EN 13892-2)
<b>Tensile Strength</b>	Cured for 28 days at +20 °C	9 MPa	(BS 6319-7)
<b>Tensile Adhesion Strength</b>	> 2.0 N/mm <sup>2</sup> (concrete failure)		(EN 1542)
<b>Coefficient of Thermal Expansion</b>	3.6 × 10 <sup>-5</sup> °C <sup>-1</sup>		(ASTM C531)
<b>Reaction to Fire</b>	Class B <sub>fl</sub> -s1		(EN 13501-1)
<b>CHEMICAL RESISTANCE</b>	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.		
<b>Skid / Slip Resistance</b>	PTV, slider 96	35 wet conditions	(EN 13036-4)
	Class	R 10	(DIN 51130)
<b>Electrostatic Behaviour</b>	Resistance to ground	R <sub>G</sub> < 1 × 10 <sup>6</sup> Ω	(EN 1081)
	Resistance to ground	R <sub>G</sub> < 10 <sup>9</sup> Ω	(IEC 61340-4-1)
	Body voltage generation	< 100 V	(IEC 61340-4-5)
	Resistance of person to earth	< 35 MΩ	(IEC 61340-4-5)
Note: Measurement results can be affected by ESD clothing, ambient conditions, measurement equipment, cleanliness of the floor and the test personnel.			
<b>Service temperature</b>	Maximum	+70 °C	
	Minimum	-15 °C	


## APPLICATION INFORMATION

<b>Consumption</b>	<b>Layer</b>	<b>Product</b>	<b>Consumption</b>
	Primer	Sika® Ucrete® MF	2–3 kg/m <sup>2</sup>
	Earthing connection	Copper tape	Maximum distance 10 m between strips
	Wearing layer	Sika® Ucrete® MF 40 AS	8–10 kg/m <sup>2</sup> for 4 mm 12–14 kg/m <sup>2</sup> for 6 mm
<b>Layer Thickness</b>	~4–6 mm		
<b>Product Temperature</b>	Maximum	+25 °C	
	Minimum	+18 °C	
<b>Ambient Air Temperature</b>	Maximum	+35 °C	
	Minimum	+18 °C	

Substrate Temperature	Maximum	+30 °C
	Minimum	+18 °C
Curing time	<b>Substrate temperature</b>	<b>Return to traffic</b>
	+18 °C	< 24 hours
	+15 °C	4 hours (with Sika® Ucrete® Accelerator)
Note: Times are approximate and will be affected by changing ambient and substrate conditions.		

## SYSTEM INFORMATION

### System Structure

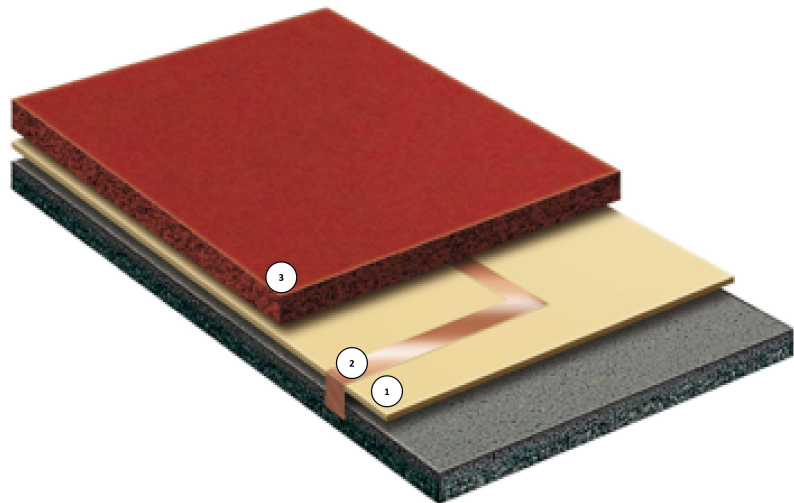

	Layer	Product
1.	Primer	Sika® Ucrete® MF
2.	Earthing connection	Copper tape
3.	Wearing layer	Sika® Ucrete® MF 40 AS

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

## APPLICATION INSTRUCTIONS

### SUBSTRATE PREPARATION

#### IMPORTANT

#### Reduced service life due to incorrect treatment of cracks

The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

1. For static cracks, ensure the width is suitable for overcoating with Sika® Ucrete® MF 40 AS.

2. For dynamic cracks, ensure the movement is within the movement capacity of Sika® Ucrete® MF 40 AS.

#### TREATMENT OF JOINTS AND CRACKS

Construction joints and existing static surface cracks in substrate require pre-treating before full layer application. Use Sikadur® or Sikafloor® resins.

The System can be applied on green or damp concrete with no standing water. Allow for at least 3 days for early concrete shrinkage to occur to prevent shrinkage cracks from appearing on the wearing surface.

Cementitious substrates must be structurally sound and of sufficient compressive strength (minimum 30 N/mm<sup>2</sup>) with a minimum tensile strength of 1.5 N/mm<sup>2</sup>.

Substrates must be clean, dry and free of contaminants such as dirt, oil, grease, coatings, laitance, surface treatments and loose friable material.

### APPLICATION

Application must be undertaken by a fully trained and licensed Sika® Ucrete® applicator.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users can always refer to the most recent version of the local Product Data Sheet for the relevant product, available on our website. The information in any downloaded version is valid as of the time of download.

### **Sika Limited (Vietnam)**

Nhon Trach 1 Industrial Zone,  
Nhon Trach Dist., Dong Nai Province,  
Vietnam  
Tel: (84-251) 3560 700  
Fax: (84-251) 3560 699  
sikavietnam@vn.sika.com



### **Product Data Sheet**

Sika® Ucrete® MF 40 AS  
October 2025, Version 02.01  
02081400000002026

SikaUcreteMF40AS-en-VN-(10-2025)-2-1.pdf